

## Portable RF/EMI Shielded Enclosures

Select Fabricators' RF/EMI Shielded Portable Enclosures allow quick and easy set up and break down for rapid deployment whenever the enclosure is needed. As an economical alternative to traditional hard wall chambers, SFI's RF Shielded Tents and Enclosures match shielding effectiveness in comparison. Independent testing to IEEE® 299 of a complete assembled tent system including installed components, resulted in a minimum attenuation of -85 dB over a range of frequencies from 20 MHz to 40 GHz measuring through the wall at multiple locations. Customers can choose from standard size enclosures or opt to have an enclosure designed and built to custom specifications.




### Optimum Protection

Manufactured using Nova Select™ silver/copper/ nickel conductive fabric and utilize single door {US Pat. No. 9,029,714} or double door {US Pat. No. 8,530,756} patented seal system. The double magnet strip closure delivers maximum isolation throughout the life of the Enclosure.

### Construction

Made in the USA with Berry Amendment compliant materials. Nova Select is a silver/copper/nickel conductive fabric with an average shielding effectiveness of over -95 dB in the range of 20 MHz to 40 GHz. Optional penetrations can have an effect on the overall shielding performance.

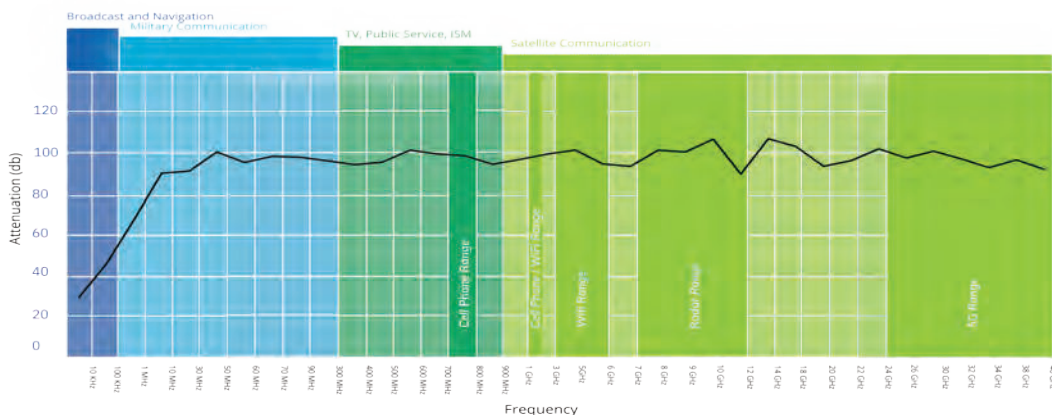

### Applications

EMC Testing

Vehicle Testing

Wireless Device Testing



**Series 100 Frames**  
Pop-up style steel frame in five different standard footprints for fast deployment and economical cost.  
Tools: N/A  
Frame Set-up: 5 minutes



**Series 500 Frames**  
Heavy-duty round extruded aluminum frame with tension system connectors. Includes tighter profile and more rugged frame.  
Tools: Hex key  
Frame Set-up: 15-45 minutes



**Series 700 Frames**  
Lightweight neoprene inflatable frame that allows rapid deployment.  
Tools: Inflator  
Frame Set-up: 60-90 seconds



**Patented Door Closure System**  
Using two strips of heavy-duty flexible magnet to create a tight conductive seal, allows attenuation levels to exceed -90 dB after over 5000 openings. Single door (US Pat 9,029,714) or double door (US Pat 8,530,756).



**IO Filter Plates and Panels**  
Integrated I/O filter plates. Can include filtration for AC Power, Ethernet, USB, SMA, BNC, N-type, Fiber Optics, and more.

### Standard Features

- Standard size patented double magnet door size: 32" x 70"
- Heavy duty tarp flooring to protect the conductive floor
- Protective tent carry/storage bag
- Shielding Effectiveness Certificate
- Complete assembly instructions and engineering support
- One-year limited warrant

### Liners

- Flame retardant /resistant liner
- ESD liner to provide static control
- Sound reduction/absorbing lining and sound masking systems

### Construction Options

- Exterior covers for outdoor deployment
- Vestibule entrance
- Zero-threshold door
- Custom size door
- Shielded Windows
- Rugged flooring option
- Pelican storage cases
- Shipping cases
- Airline compatible travel cases
- Frame cases

### Other

- RF / microwave absorbing foam
- I/O filter plates
- EMI hardened lights
- In-house or independent IEEE 299 (1-18 GHz testing of completed enclosure)
- Custom engineering/design of enclosure

STANDARD ENCLOSURE SIZES FOR SERIES 100 FRAMES

Enclosure Size		Frame Size	
Length	Width	Length	Width
4'	4'	5'	5'
7'	7'	8'	8'
9'	9'	10'	10'
9'	14'	10'	15'
9'	19'	10'	20'